

B201 SR Gate

Entrance control / Swing gates

The B201 security rated swing gate complements the A1 SR rated fencing system and offers the same protection as the fence line. The gate has been tested and accredited for A1 security rating and withstands an attack for 1 minute with tools like crowbar, screwdriver, plier etc.

These swing gates are available in a wide range of heights up to 4.2m and widths from 1.2m to 10m. Available in single or double leaf and in two different infills (Pallas 868 double wire or Zenith 358 mesh).


The swing gate is equipped with adjustable security hinges which prevent the gate from being lifted at any point. All gates are fitted with a fall arrestor system to comply with the latest safety requirements.

Further security can be added with anti-climb devices such as spikes or razor/ barbed wire. Other system integration options include a range of detection systems and access control.

- · A1 (SR1) accredited swing gate
- · Single or double leaf
- · Pallas 868 double wire or Zenith 358 mesh infill
- · Wide range of widths and heights
- Security hinges
- SR rated padlock ready (optional)



Drawings (dimensions in m)

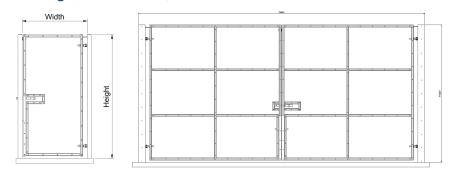

Technical specifications

Single lea	f gates	Palla	s SR1	/ A1	Zenith SR1 / A1				
Туре	Height	Full Height	A-Frame	1.2	1.5	2.0	1.2	1.5	2.0
Single	1.8	✓		✓	✓	~	~	0	0
Single	2.0	✓		✓	✓	✓	✓	0	0
Single	2.4	✓		✓	✓	✓	✓	✓	✓
Single	2.4		✓		0	0		0	0
Single	3.0		✓	✓	✓	✓	✓	✓	✓
Single	4.2		✓	0	0	0	✓	✓	✓

/	accredited available as standard
0	accredited available as special
	not accredited, not available

Double leaf gates Pal					Pallas SR1 / A1								Zenith SR1 / A1								
Туре	Height	Full Height	A-Frame	1.8	3	4	5	6	7	8	9	10	1.8	3	4	5	6	7	8	9	10
Double	1.8	✓		0	~	✓	~	~	~	✓	✓	✓	0	0	0	0	0	0	0	0	0
Double	2.0	✓		0	✓	✓	✓	✓	✓	✓	✓	✓	0	0	0	0	0	0	0	0	0
Double	2.4	✓		0	✓	✓	✓	✓	✓	✓	✓	✓	0	✓							
Double	3.0	✓		0	✓	✓	✓	✓	0	0	0	0	0	✓	✓	✓	~	0	0	0	0
Double	4.2	✓		0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0

Material	Steel
Colour (other colours available upon request)	RAL 6005 (moss green) RAL 9005 (jet black)
Finish	Hot dip galvanized according to BS EN1461 Polyester powder coated optional
Hinges	Security Rated
Certified	Loss Prevention Cert Board
Drop Bolt	Steel Bar Ø20
Open/Close	Manual
Infill	Pallas double wire 868 or Zenith 358 single skin
Locking	Slide Latch Accredited Padlock
Posts	In ground or base plated

Certificates

- ISO 9001
- CE
- UKCA
- BS EN 1461
- EN12604:2017 Wind Class 2
- EN13241
- LPS 1175: Issue 8 A1 (SR1)

Ordering information

Contact your local Heras office for precise ordering details.

Suggested accessories

- Accredited padlock
- Razor or barbwire topping

